



WEVER & DUCRÉ  
LIGHTING

# BOX WALL mini 1.0

300120W0

Project
Type
Notes
Quantity
Date

## GENERAL

Wall  
 Surface  
 Signal White  
 IP20  
 Interior  
 420<sup>a</sup> to 425<sup>b</sup> lm  
 RAL 9003<sup>c</sup>

## LED

Lamp PAR16  
 PAR16  
 Socket GU10  
 max. 12 W  
 L70 / 50000 h

## PHYSICAL

Length 67 mm  
 Width 67 mm  
 Height 115 mm  
 0.24 kg




## ELECTRICAL

100 - 240 V  
 Total connected power 8.8<sup>b</sup> to 8.9<sup>a</sup> W  
 PC1  
 Safety distance 0.3 m


<sup>a</sup> LED 3000K CRI 80 white

<sup>b</sup> LED 2700K CRI 80 white

<sup>c</sup> RAL Palette colors may deviate slightly due to production conditions.

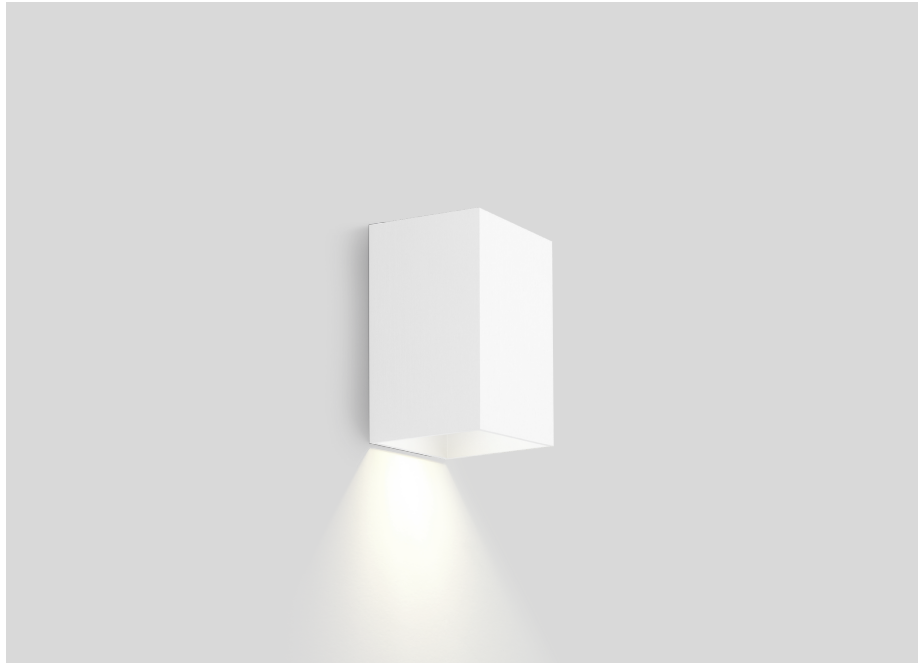

## LIGHT DISTRIBUTION



[300120W0] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.  
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ  
LIGHTING

# BOX WALL mini 1.0

300120W0

## LED LAMPS

### PAR16 LED Lamp

TYPE	COLOUR	Ø·H (MM)	ORDERCODE
2700K   >90 CRI   GU10	Jet Black	∅50·58	9 0 1 2 2 8 B 3
3000K   >90 CRI   GU10	Jet Black	∅50·58	9 0 1 2 2 8 B 5
2700K   >80 CRI   GU10	Signal White	∅50·58	9 0 1 2 2 8 W 2
2700K   >90 CRI   GU10	Signal White	∅50·58	9 0 1 2 2 8 W 3
3000K   >80 CRI   GU10	Signal White	∅50·58	9 0 1 2 2 8 W 4