



WEVER & DUCRÉ  
LIGHTING

# DEEP bijou IP65 1.0

165361W5

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling

Recessed

White Matt

RAL 9003<sup>a</sup>

IP65

Exterior

500 lm

## LED

3000 K

CRI  $\geq$  90

L80 / 50000 h

2-step binning

## OPTICAL

Flood

Beam angle 30°

## ELECTRICAL

excl. driver

8 V

LED Inset 4.1 W

500 mA

Class 3

Safety distance 0.3 m

## PHYSICAL

Diameter 56 mm

Height 55 mm

0.1 kg

wire springs

## CUTOUT


Diameter 50-52 mm

Min. ceiling thickness 4 mm


Max. ceiling thickness 25 mm

Recessed depth 85 mm


<sup>a</sup> Color may deviate slightly due to production conditions.

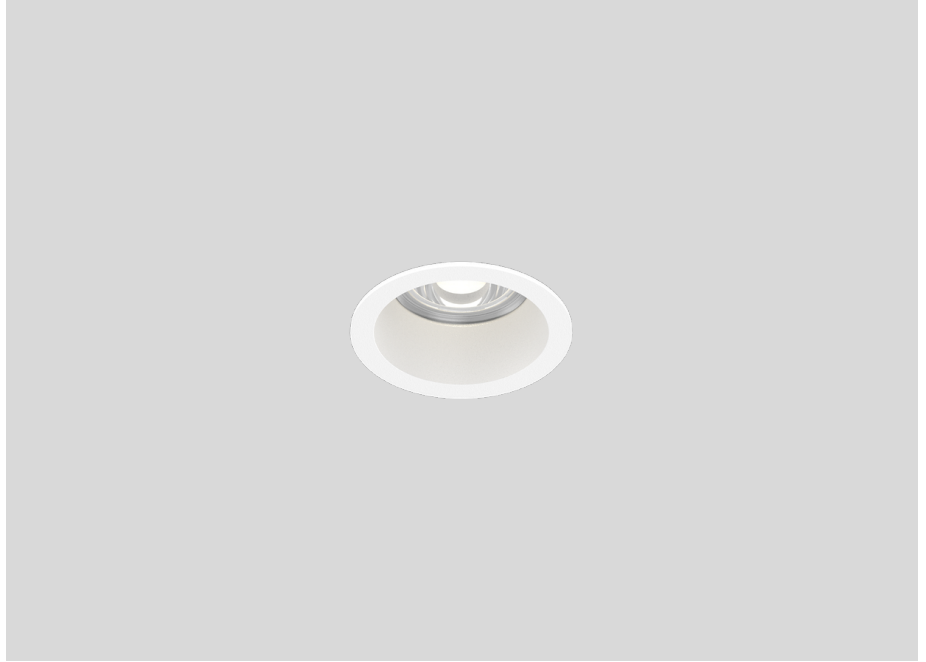

Round ceiling recessed downlight made from die-cast aluminium; surface White Matt; powder coated; matt texture; RAL 9003; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 85 mm; beam angle 30°; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam  $\leq$  2 SDCM; CRI  $\geq$  90; UGR  $\leq$  16; degree of protection IP65; PC3; IC rated; driver not included; light source not replaceable;



## LIGHT DISTRIBUTION



[165361W5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.  
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ  
LIGHTING

# DEEP

## bijou IP65 1.0

165361W5

### CONE DIAGRAM

flood 30° 500mA

h (m)	E0° (lx)	ø (m)
1	1450	0.54
2	360	1.07
3	160	1.61
4	90	2.15
5	60	2.68

### ELECTRICAL

#### Driver

TYPE	L · W · H (MM)	ORDERCODE
7W   500mA   5-14,5V   IP67	57-41-24	9 0 2 1 4 3 0 1
6.5W   500mA   7-13V	122-41-23	9 0 2 2 4 3 0 1