



WEVER & DUCRÉ
LIGHTING

RETO WALL SURFACE OUTDOOR 1.3

745564Q5

Project
Type
Notes
Quantity
Date

GENERAL

Wall
 Surface
 Bronze
 Below IP65
 Exterior
 140 lm

LED



3000 K
 CRI \geq 90

ELECTRICAL


phase-cut dim
 220 - 240 V
 Total connected power 4.8 W
 Class 1
 Safety distance 0.3 m

PHYSICAL


Length 130 mm
 Width 36 mm
 Height 130 mm
 0.63 kg

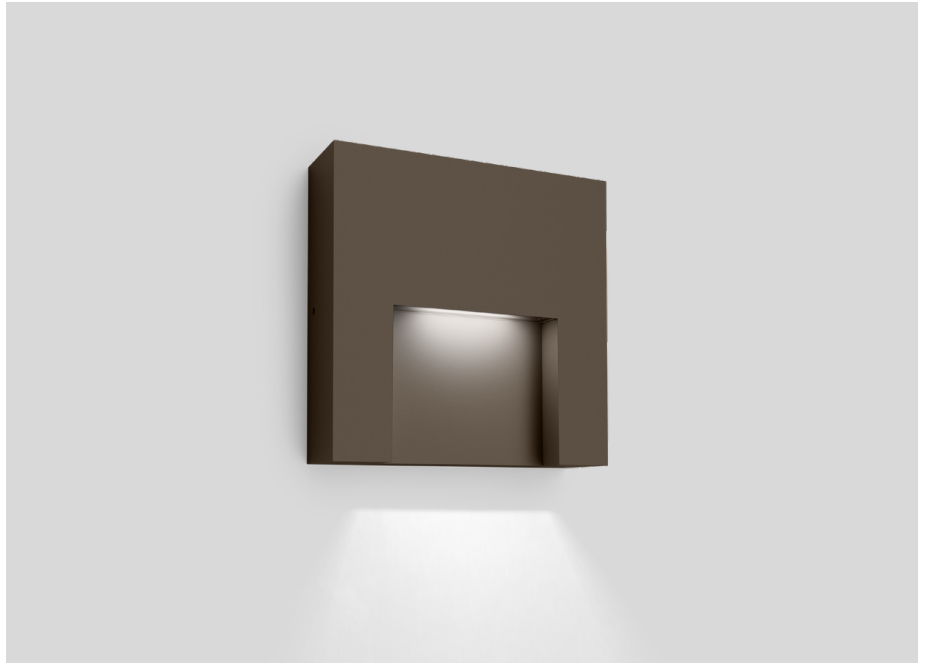

Squared wall surface mounted luminaire made from aluminium; surface Bronze; powder coated; matt texture; PCB 3-step binning; light colour 3000 K; CRI 90; degree of protection IP65; PC1; driver included; light source not replaceable;



LIGHT DISTRIBUTION

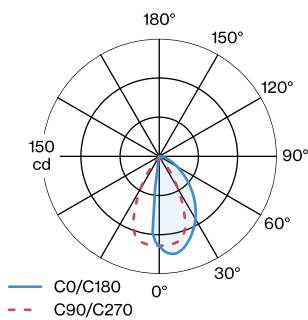

[745564Q5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
 © Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

RETO WALL SURFACE OUTDOOR 1.3

745564Q5