

GAMMA

Gamma fits perfectly in all spaces where $UGR < 19$ downlighting and opal uplighting is required. Featuring an essential and linear design, and a light source running the entire length of the lamp arm, it is equipped with a dimmable push button for separate management of direct and indirect light. Available in black and with two LED color temperatures.

By Bernhard Osann



3000K | DIMMER ON BOARD

LAMPING


Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes
MGAM35A1/49WNE

Structure
black

PACKAGE
Package 01
Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

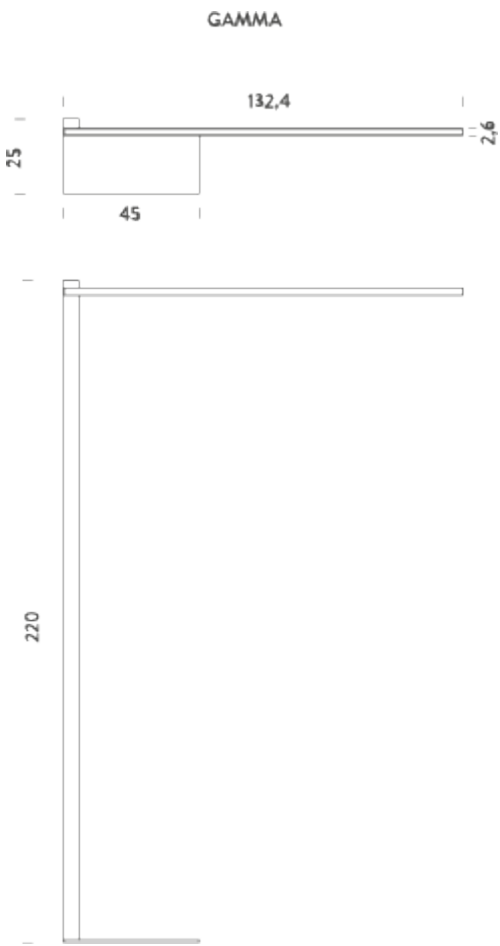

3000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	3000K
Luminous flux	3800lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49WNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

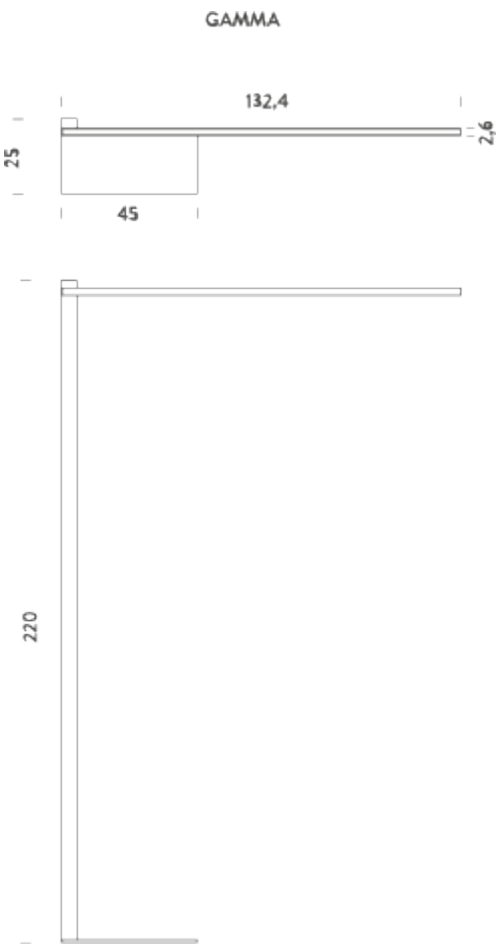

4000K | DIMMER ON BOARD

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM35A1/49NNE


Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

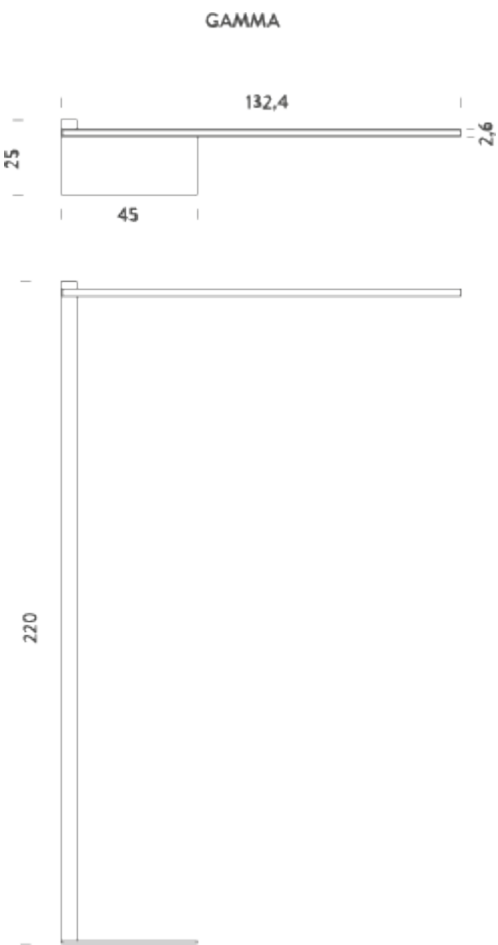

4000K | DIMMER ON BOARD + CASAMBI

LAMPING

Source	LED strip
Total power	55W
Emission	downlight UGR<19 / opal uplight
Switching	dimmer on board + Casambi
Tension	220/240V
Color temperature	4000K
Luminous flux	4000lm
Initial luminaire efficacy	73lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	25x132,4x220cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	UGR<19 separate control dimmable push button RAL 9005 black driver included
Net lamp weight	10,6 kg

Codes

MGAM3CA1/49NNE

Structure

black

PACKAGE

Package 01 Dimension: 230x35x18 cm / Gross weight: 14,6 kg

Certificazioni

